




CAB OVER ENGINE **CA 38**
NON-SLEEPER


**F MODEL STANDARD
NON-SLEEPER CAB**

CAB OVER ENGINE • 50.5" BBC DIMENSION

SUITABLE FOR DOUBLE-BOTTOM OPERATIONS

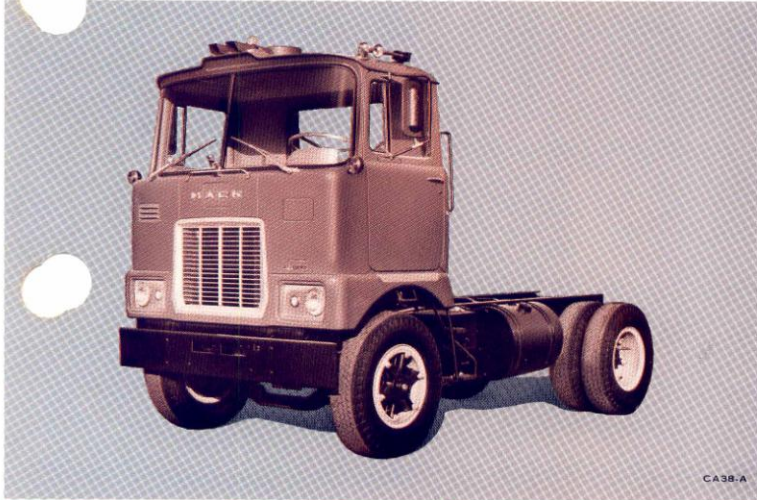

CA38-A

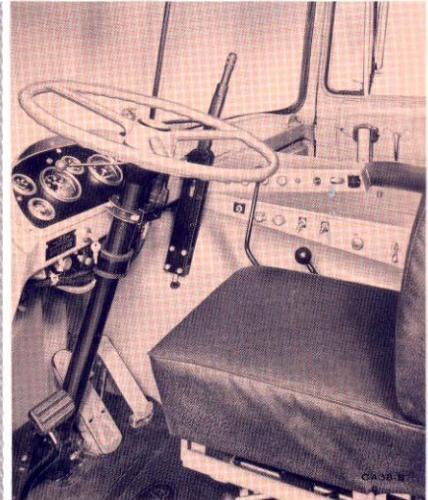


CA38-B



CA38-C

- Spacious cab interior despite short BBC length.
- Cab experience designed modern in appearance and extremely functional and safe.
- High, wide windshield affords excellent visibility.
- Three-point cab mounting.

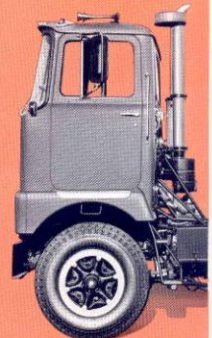

CA38-D

MACK TRUCKS, INC.

GENERAL DETAILS: Cab over engine, without sleeper compartment. All steel spotwelded frame and box panel construction undercoated and fully insulated.

MOUNTING: Three point mounting

Rear—Hook design mounting with auxiliary safety hook in addition to main cab rear hook. Rear support incorporates rubber isolated center section to which hooks attach.

Tilting mechanism—Double torsion bar actuated with a 42° forward tilt, positive stopped with a safety lock, on right side of chassis, for raised cab.

WINDOWS: Extra large two-piece windshield is backward slanting at 10° with curved outer ends. Glass is laminated safety plate and green tinted. Door and standard rear window are of clear, laminated safety glass.

VENTILATION: Roof—One double purpose screened vent with scoop—permitting air intake and exhausting of cab. Cab front—One left side front facing screened vent. One right side front facing screened vent used for cab heater fresh air intake when heater is furnished. Doors—One quarter vent window in each cab door.

SEATING: Driver's seat—Seat cushion, foam rubber top over four-way laced graduated coil springs mounted on plywood

base. Back cushion, rubberized curled hair pad over four-way laced coil springs mounted on metal back pan. Adjustments—Two angular positions back cushion, two vertical positions of seat cushion front, four vertical positions of seat cushion, rear; four inch front and rear adjustment.

Covering—Grey vinyl coated fabric with top covering of back and seat cushion of breathable material.

Rider's Seat—(Optional, extra charge). Seat and back cushion same as driver's seat. Adjustment, same as driver's seat except for fore and aft adjustments. Covering, same as driver's seat.

HEATING: (Optional, extra charge). Fresh or recirculating air hot water type, hinge mounted on right side of cab with defrosters.

Capacity—Power operation, 28,000 BTU, fan capacity, 272 CFM, 150 diff. (entering air to water). Make, Evans Products.

INTERIOR COLORS: Trim panels, light grey (Mack 707); Metal, green enamel (Mack 808).

DIMENSIONS: In inches: (Less exterior hardware)

Bumper to back of cab	50.5
Width	92
Height	73.5
Length	50


EQUIPMENT—STANDARD

- Ash Tray
- Automatic reset circuit breakers
- Bumper, flush type
- Cab roof vent, two-way
- Chassis record card pocket on left side sun visor
- Cigar lighter
- Coat hook
- Defroster plenum with orifices
- Dispatch box, console mounted
- Door locks, right and left side (internal and external locking) ignition mastered
- Door mechanism and window control, removable, panel mounted
- Floor mats, rubber, with jute back
- Grab handles: Outside cab, right and left side; front for windshield cleaning; rear of cab, left side. Inside cab, instrument panel mounted, right side
- Horn, electric, single tone
- Lighting:
 - One interior cab light
 - Dual headlights and
 - Dual parking lights, recessed mounted
 - ICC lights, one each corner and
 - Marker lights, three, cab roof
- Rear view mirrors, dual West Coast type, black enamel finish

- Seat belt anchors
- Sound deadener on outer door panels
- Windshield wipers; dual heavy-duty bottom mounted, actuated by individual motors and controls
- Steps:
 - Left side, double tread fixed ladder type step
 - Right side, single rung fixed tube type step
 - Right and left side pivoted intermediate steps over wheel house
 - Cab door skirt panel scuff panels
- Sun visor, left side, padded
- Turn signals, front (with 4-way flasher)
- Undercoating
- Wheel splash aprons
- Windshield glass, Solex
- Instruments and Controls,
 - Speedometer
 - Tachometer, single hand
 - Fuel gauge
- Lube oil pressure gauge
- Air pressure gauge with buzzer type low pressure indicator
- Engine temperature gauge
- Voltmeter
- Engine stop control
- Throttle control

OPTIONAL EQUIPMENT

- Arm rest, rider's seat
- Cab air conditioning, roof mounted
- Cab heater, 28,000 btu
- Chrome plated grill
- Chrome plated West Coast type rear view mirrors
- Horn, air, twin or single
- Horn, electric, dual tone
- Seat belts for driver and rider
- Seat, driver
 - Bostrom, Viking T-Bar, West Coaster, or Level-Aire
 - American Metal, Unison-Action
 - General Seating, #107
- Seat, helper (same cushion and covering as driver's)
- Sun visor, right side, padded
- Wig-Wag low air pressure indicator
- Window lift, electric, right side
- Windshield washers with foot actuated pump

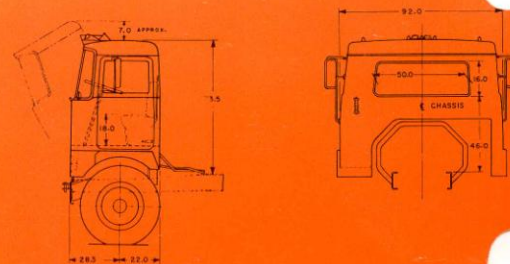

Dimensions are in inches unless otherwise noted.

CA38-10

MACK TRUCKS, INC., ALLENTOWN, PA. 18105

"The Truck Capital of the World"