


AUSTRALIAN PRICE LIST.

R600RS SERIES.

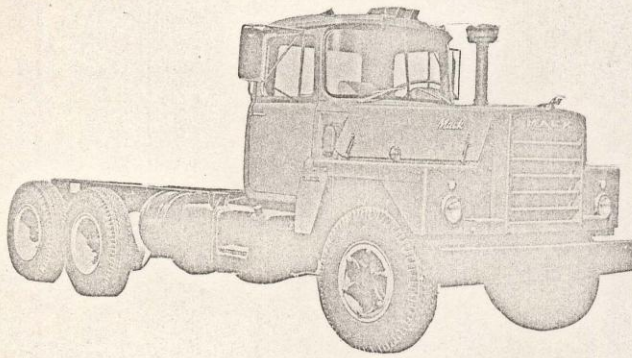

MODELS AVAILABLE

R609RS
R611RS
R615RS
R685RS

STANDARD ON ALL CHASSIS.

Wheelbase 171"
Platform (LP 144") (96" CA)
Frame 9" x 3 $\frac{1}{4}$ " x $\frac{1}{4}$ "
Lube Oil Filter Combination full flow by-pass
Front Axle FA535
Bogie SWD57
Carriers CRDPC92 & CRD93
Ratio: 4. 17, 4. 50, 4. 76, 5. 13,
5. 73, 6. 34, 7. 00, 7. 44
Wheels Cast Spoke
Tyres 11 - 10.00 x 20 12 ply Standard Tread
Rim 7.5 x 20
Brakes Air
Steering Gear SG26
Electrical System 12 volt. 55 amp.

Starting Electric 12 volt.
Cab CAR36
Fuel Tanks 55 gal. right side steel
rect. step
Radiator Shutters Automatic
Front Bumper Extended
Tachometer Single Hand
Towing Eyes Front
Turn Signals Front
Rear View Mirrors Two West Coast
Horn Electric Single Tone
I. C. C. Lights Furnish
Marker Lights Furnish
Hood & Fenders Steel Butterfly

STANDARD ON PARTICULAR CHASSIS.

<u>Model</u> <u>(includes)</u>	<u>Engine</u>	<u>Clutch</u>	<u>Transmission</u>	<u>Radiator Size</u>	<u>Standard Price</u>
R609RS	END711	CL28	TRD722	700 sq. ins.	\$23,180.00
R611RS	ENDT673C	CL58	TRD722	1000 sq. ins.	\$23,660.00
R615RS	END864A	CL58	TRD722	1000 sq. ins.	\$24,790.00
R685RS	ENDT675	CL50	TRDXL107	1000 sq. ins.	\$24,250.00

STANDARD WEIGHTS.

	<u>Front</u>	<u>Rear</u>	<u>Total</u>
R609RS	6,065 lbs.	7,924 lbs.	13,989 lbs.
R611RS	6,193 lbs.	7,931 lbs.	14,124 lbs.
R615RS	6,688 lbs.	7,971 lbs.	14,659 lbs.
R685RS	6,146 lbs.	7,934 lbs.	14,080 lbs.

R600RS SERIES.

OPTIONAL CHASSIS EQUIPMENT.

	Price	Weight	
		Front	Rear
<u>Wheelbase:</u> 171" W.B. (LP 168", CA 96")	\$40.00	10	40
183" W.B. (LP 168", CA 108")	40.00	25	60
195" W.B. (LP 196", CA 120")	91.00	35	85
223" W.B. (LP 240", CA 148")	164.00	125	250
275" W.B. (LP 288", CA 200")	410.00	154	308
<u>Frame Reinf.</u> $\frac{1}{4}$ " Inside Channel (for 171" W.B.)	198.00	100	235
(for 183" W.B.)	198.00	110	260
(for 195" W.B.)	198.00	120	285
(for 223" W.B.)	235.00	196	382
(for 275" W.B.)	266.00	242	470
<u>Starting:</u> Electric Starting 24 volt.	N/C	None	
Air Starting	350.00	-80	-82
<u>Clutch:</u> CL58 (in place of CL28)	43.00	15	7
CL50 (in place of CL28)	73.00	28	10
CL50 (in place of CL58)	30.00	13	3
<u>Transmission :</u> TRD7220	N/C	None	
TRQ7220 Quadruplex	260.00	78	39
TR7220 & B/L8031C or P Auxiliary	591.00	20	6
TR722 & B/L8031C or P "	591.00	20	12
TR7220 & B/L8031 C or P Aux. with Power Tower.	1178.00	95	56
TR722 & B/L8031C or P Aux. with Power Tower	1178.00	75	70
Overgear transmission required when G. V. W. exceeds 73,000 lbs.			
<u>Front Axle:</u> FA532	86.00	115	
FA600	554.00	205	
<u>Power Steering:</u>			
SGP40 Sheppard, Integral, Hydraulic (for FA535)	358.00	95	
SGP40 Sheppard, Integral, Hydraulic (for FA532 & FA600)	406.00	99	
Air-O-Matic (for FA535, FA532)	320.00	65	
Air-O-Matic (for FA600)	373.00	75	
<u>Bogie:</u>			
SWD5701 (Same as SWD57 except for 7" Brakes)	139.00		8
SWD571 (Same as SWD57 except for cast steel axle housing & metal trunnion bushings)	251.00		105
SWD5711 (Same as SWD571 except for 7" Brakes)	390.00		113

R600RS SERIES.

	Price	Weight	
		Front	Rear
<u>Bogie (Contd)</u>			
SWD572 (Same as SWD571 except with H.D. Torque rods, solid trunnion shaft & 55" bogie spacing).	\$420.00		158
SWD5721 (Same as SWD572 except with 7" Brakes)	560.00		251
<u>Power Divider Lockout</u> (not available at present for Maxidyne Series)			
	132.00		50
<u>Electrical System:</u> 12 volt. 55 amp. Alternator	N/C	-25	
12 volt. 60 " " (Heavy Duty)	91.00	-10	
12 volt. 85 " " (Heavy Duty)	102.00		None
<u>Fuel Tanks:</u> In addition to STANDARD.			
55 gal. left side steel, rect. step	129.00	85	35
70 gal. left side, steel, rect. step	160.00	95	45
85 gal. left side steel, rect. step	214.00	125	50
In place of STANDARD.			
55 gal. right side, Alum. rect. step	53.00	-40	-15
55 gal. one each side, Alum. rect. step	235.00	3	
55 gal. right side, 70 gal. left side, Alum. rect. step	235.00	7	3
70 gal. left side, steel, rect. step	32.00	10	10
70 gal. left side, alum. rect. step	86.00	-33	-12
85 gal. one each side, steel, rect. step	305.00	160	65
<u>Heater:</u> 37,500 B. T. U. Fresh Air Type Hot Water Heater & Defroster			
	115.00	30	
<u>Radiator:</u> Plate Type Radiator Guard	34.00	70	
1000 sq. in. Radiator (in place of 700 sq. in)	160.00	30	
<u>Vertical Exhaust.</u> Right rear corner of cab	65.00	30	10
<u>Brake & Elec. Conn.</u> Semi-Trailer	55.00	10	10
<u>Hood & Fenders:</u> Unitized Fiber Glass in place of steel			
Credit.	261.00	-383	-40

R600RS SERIES.

		<u>Weight</u>	
		<u>Front</u>	<u>Rear</u>
<u>Rims:</u>			
Spare Rim 7.5" x 20"	\$25.00		69
Spare Rim 8.0" x 20"	25.00		79
8.0 x 20 Rims (10 only in place of 7.5 x 20)	20.00	20	80
<u>Miscellaneous.</u>			
Hand Control Valve	59.00		
Breakaway Safety Valve	38.00		
Separate Air Brake Reservoir	59.00		