


AUSTRALIAN PRICE LIST.

R600RST SERIES.

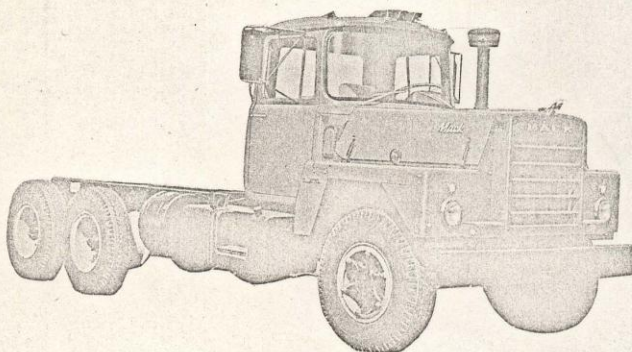

MODELS AVAILABLE.

R607RST
R609RST
R611RST
R685RST

STANDARD ON ALL CHASSIS.

Wheelbase 147"
Platform (LP) 120" (72" CA)
Frame 9" x 3 $\frac{1}{4}$ " x $\frac{1}{4}$ "
Lube Oil Filter Combination full-flow by pass
Front Axle FA534
Bogie SWDL56
Carriers CRDPC92 & CRD93
Ratio: 4. 17, 4. 50, 4. 96, 5. 13, 5. 73
6. 34, 7. 00, 7. 49
Wheels Cast Spoke
Tyres: 11- 10.00 x 20 12ply Standard Tread
Rims 7. 5" x 20"
Brakes Air
Steering Gear SG26
Electrical System 12 volt. 55 amp.

Starting 12 volt.
Cab CAR36
Brake & Elec. Conn. Semi-Trailer
Fuel Tanks 55 gal. right side, steel,
rect., step.
Radiator Shutters Automatic
Shock Absorbers Front
Front Bumper Extended
Tachometer Single Hand
Towing Eyes Front
Turn Signals Front
Rear View Mirrors 2 West Coast
Horn Electric, Single Tone
I. C. C. and Marker Lights Furnish
Hood & Fenders Steel Butterfly

STANDARD ON PARTICULAR CHASSIS.

<u>Model</u> <u>(includes)</u>	<u>Engine</u>	<u>Clutch</u>	<u>Transmission</u>	<u>Radiator Size</u>	<u>Standard Price</u>
R607RST	END673P (187 HP)	CL28	TRD722	560 sq. in.	\$22,400.00
R609RST	END711 (211 HP)	CL28	TRD722	700 sq. in.	\$22,670.00
R611RST	ENDT673C (250 HP)	CL58	TRD722	1000 sq. in.	\$23,140.00
R685RST	ENDT675 (237 HP)	CL50	TRL107	1000 sq. in.	\$23,630.00

<u>STANDARD WEIGHTS.</u>	<u>Front</u>	<u>Rear</u>	<u>Total.</u>
R607RST	6,439	7,120	13,559
R609RST	6,418	7,140	13,558
R611RST	6,473	7,147	13,620
R685RST	6,349	7,115	13,464

R600RST SERIES.

OPTIONAL CHASSIS EQUIPMENT.

	<u>Price</u>	<u>Weight</u>	
		<u>Front</u>	<u>Rear</u>
<u>Wheelbase:</u> 165" W. B. (LP 138", CA 90")	\$40.00	25	60
171" W. B. (LP 168", CA 96")	164.00	30	70
183" W. B. (LP 156", CA 108")	98.00	35	85
195" W. B. (LP 168", CA 120")	128.00	45	110
<u>Frame Reinf:</u> $\frac{1}{4}$ " Inside Channel (for 147" W. B.)	198.00	100	235
(for 165" W. B.)	198.00	110	260
(for 171" W. B.)	198.00	115	270
(for 183" W. B.)	198.00	120	285
(for 195" W. B.)	198.00	130	310
<u>Starting:</u> Elec. Starting 24 volt.	N/C	None	
* Air Starting	350.00	-104	-84
* Not available on 147" W. B. with 55 gal. R. H. Fuel Tank.			
<u>Clutch:</u> CL58 (in place of CL28)	43.00	15	7
CL50 (in place of CL28)	73.00	28	10
CL50 (in place of CL58)	30.00	13	3
<u>Transmission :</u> TRD7220	N/C	None	
TRT722 or TRT7220 Triplex	149.00	20	12
TRQ7220 Quadruplex	260.00	78	39
Overgear transmission required when G. C. W. exceeds 73,000 lbs.			
<u>Front Axle:</u> FA535	172.00	115	
FA532	257.00	205	
<u>Power Steering:</u>			
SGP40 Sheppard, Integral, Hydraulic (FA534 and FA535)	358.00	95	
SGP40 Sheppard, Integral, Hydraulic (FA532)	406.00	99	
Air-O-Matic (FA534, FA535 & FA532)	320.00	65	
<u>Bogie:</u>			
SWDL561 (Camel-back suspension Mack 7" brakes)	139.00		100
SWD571 (Camel-back suspension Mack 6" brakes)			
cast steel axle housing and metal trunnion			
bushing	619.00		1041
SWD5711 (Same as SWD571 except 7" Brakes)	758.00		1049

R600RST SERIES.

		<u>Front</u>	<u>Weight</u> <u>Rear</u>
<u>Bogie (contd)</u>			
SWD75 (Inverted Camel-back suspension Mack 6" brakes)	Net Allowance.	\$14.00	-140
SWD572 (Same as SWD571 except with H.D. Torque rods, solid trunnion shaft & 55" bogie spacing)		779.00	917
SWD5721 (Same as SWD572 except with 7" brakes)		920.00	1010
<u>Power Divider Lockout</u> : (Not available at present on Maxidyne Series)		132.00	50
<u>Electrical System</u> :			
12 volt. 55 amp. Alternator	N/C	-25	
12 volt. 60 amp. " (Heavy Duty)	91.00	-10	
12 volt. 85 A. " " "	102.00		None
<u>Fuel Tanks</u> : In addition to STANDARD.			
55 gal. left side, steel, rect. step	129.00	85	35
70 gal. left side, steel, rect. step	160.00	95	45
85 gal. left side, steel, rect. step	214.00	125	50
In place of STANDARD.			
55 gal. right side, alum. rect. step	53.00	-40	-15
55 gal. one each side, alum., rect. step	235.00	3	
55 gal. right side, 70 gal. left side, alum. rect. step	235.00	7	3
70 gal. left side, steel, rect. step	32.00	10	10
70 gal. left side, alum., rect. step	86.00	-33	-12
85 gal. one each side, steel " "	305.00	160	65
<u>Heater</u> :			
37, 500 B. T. U. Fresh Air Type Hot Water Heater and Defroster	115.00	30	
<u>Radiator</u> : Plate type Radiator Guard			
700 sq. in. Radiator	34.00	70	
(in place of 560 sq. ins)	43.00	10	
1000 sq. in. Radiator			
(in place of 560 sq. ins)	203.00	40	
1000 sq. in. Radiator			
(in place of 700 sq. in)	160.00	30	
<u>Vertical Exhaust</u> : Right rear corner of cab.	65.00	30	10

R600RST SERIES.

	<u>Price.</u>	<u>Weight</u>	
		<u>Front</u>	<u>Rear</u>
<u>Hood and Fenders:</u> Unitized Fibre Glass in place of Steel	<u>Credit</u> \$261.00	-383	-40
<u>Rims.</u> Spare Rim 7.5 x 20	25.00		69
Spare Rim 8.0 x 20	25.00		79
8.0 x 20 Rims (10 only in place of 7.5 x 20)	20.00	20	80
<u>Miscellaneous.</u>			
<u>Hand Control Valve</u>	59.00		
Breakaway Safety Valve	38.00		
Separate Air Brake Reservoir	59.00		