


AUSTRALIAN PRICE LIST.

R600RT SERIES.

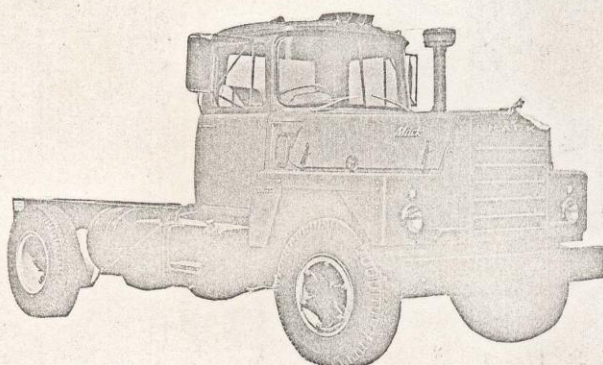

MODELS AVAILABLE.

R609RT
R611RT
R685RT

STANDARD ON ALL CHASSIS.

Wheelbase 147"
Platform (LP) 105" (72" CA)
Frame 9" x 3 $\frac{1}{4}$ " x $\frac{1}{4}$ "
Lube Oil Filter Combination full flow by pass
Front Axle FA534
Rear Axle RAD529
Carrier CRD117
Ratio 4.00, 4.25, 4.62, 4.88
5.43, 5.78, 6.36, 6.80
Wheels Cast Spoke
Tyres 7 - 10.00 x 20 12 ply Standard Tread
Rims 7.5 x 20
Steering SG26
Brakes Air
Electrical System 12 V 55 A.

Starting 12 volt.
Cab: CAR36
Brake & Elec. conn. Semi-Trailer
Fuel Tank 55 gall. right steel step
Radiator Shutters Automatic
Shock Absorbers Front
Front Bumper Extended
Tachometer Single Hand
Towing Eyes Front
Turn Signals Front
Rear View Mirrors Two West Coast
Horn Electric Single Tone
I. C. C. Lights Furnish
Marker Lights Furnish
Hood and Fenders Steel Butterfly
Right Hand Drive.

STANDARD ON PARTICULAR CHASSIS.

<u>Model</u> <u>(includes) Engine</u>	<u>Clutch</u>	<u>Transmission</u>	<u>Radiator Size</u>	<u>Standard Price.</u>
R609RT END711 (211 H. P.)	CL28	TRD722	700 sq. ins.	\$19,220.00
R611RT ENDT673C(250 H. P)	CL58	TRD722	1,000 sq. ins.	\$19,680.00
R685RT ENDT675 (237 H. P)	CL50	TRDXL107	1,000 sq. ins.	\$20,620.00

STANDARD WEIGHTS.

	<u>Front</u>	<u>Rear</u>	<u>Total</u>
R609RT	6,393 lbs.	4,225 lbs.	10,618 lbs.
R611RT	6,601 lbs.	4,232 lbs.	10,833 lbs.
R685RT	6,654 lbs.	4,287 lbs.	10,941 lbs.

R600RT Series.

Optional Chassis Extras.

	<u>Price</u>	<u>Weight</u>	
		<u>Front</u>	<u>Rear</u>
<u>Wheelbase</u> 165" W.B. (LP 123", CA90")	\$98.00	25 lbs.	60 lbs.
165" W.B. (LP 138", CA90")	98.00	25 lbs.	85 lbs.
182" W.B. (LP 140", CA107")	98.00	35 lbs.	85 lbs.
<u>Frame Reinf.</u> $\frac{1}{4}$ " inside channel 147" W.B.	198.00	100 lbs.	235 lbs.
165" W.B.	198.00	105 lbs.	245 lbs.
182" W.B.	198.00	115 lbs.	260 lbs.
<u>Starting.</u> Electric Starting 24 Volt	N/C	None	
Air	350.00	-80 lbs.	-82 lbs.
<u>Clutch.</u> CL58 (in place of CL28)	43.00	15 lbs.	7 lbs.
CL50 (in place of CL28)	73.00	28 lbs.	10 lbs.
CL50 (in place of CL58)	30.00	13 lbs.	3 lbs.
<u>Transmission.</u> TRD7220	N/C	None	
TRQ7220 Quadruplex	260.00	78 lbs.	39 lbs.
* TR722 or TR7220 & B/L8031P Aux.	591.00	123 lbs.	84 lbs.
* TR722 or TR7220 & B/L8341C Aux.	695.00	138 lbs.	99 lbs.
*Min. W.B. 182" - Overgear transmission required when G. V. W. exceeds 73,000 lbs.			
<u>Front Axle</u> FA535	172.00	115 lbs.	
FA532	257.00	205 lbs.	
<u>Power Steering.</u>			
SGP40 Sheppard, Integral, Hydraulic (FA534 and FA535)	358.00	95 lbs.	
SGP40 Sheppard, Integral, Hydraulic (FA532)	406.00	99 lbs.	
Air-O-Matic (FA534, FA535 & FA532)	320.00	65 lbs.	
<u>Rear Axle:</u>			
RAD5291 Carrier CRD117 Ratio 4.00, 4.25, 4.62, 4.88, 5.43, 5.78, 6.36, 6.80	66.00	115 lbs.	
<u>Springs.</u>			
Heavy Duty Rear	34.00	31 lbs.	
Helper Springs Rear	98.00	165 lbs.	

R600RT Series.

<u>R600RT Series.</u>		<u>Price</u>	<u>Weight</u>	
			<u>Front</u>	<u>Rear</u>
<u>Electric System.</u>	12 volt. 55 Amp. Alternator	N/C	-25 lbs.	
	12 volt. 60 A. " (Heavy Duty)	\$91.00	-10 lbs.	
	12 volt. 85A. " " "	102.00		None
<u>Fuel Tanks.</u>	In addition to STANDARD			
	55 gal. left side steel rect. step	129.00	85 lbs.	35 lbs.
	70 gal. left side steel rect. step	160.00	95 lbs.	45 lbs.
	85 gal. left side steel rect. step	214.00	125 lbs.	50 lbs.
	In place of STANDARD.			
	55 gal. right side alum. rect. step	53.00	-40 lbs.	-15 lbs.
	55 gal. one each side alum. rect. step	235.00	3 lbs.	
	55 gal. right side 70 gal. left side alum rect. step	235.00	7 lbs.	3 lbs.
	70 gal. left side steel rect. step	32.00	10 lbs.	10 lbs.
	70 gal. left side alum. rect. step	86.00	-33 lbs.	-12 lbs.
	85 gal. one each side steel rect. step	305.00	160 lbs.	65 lbs.
<u>Heater.</u>	37,500 BTU. Fresh Air Type Hot Water Heater with Defrosters	115.00	30 lbs.	
<u>Radiator.</u>	Plate type Radiator Guard	34.00	70 lbs.	
	1000 sq. in. Radiator (in place of 700 sq. in.)	160.00	30 lbs.	
<u>Vertical Exhaust.</u>	Right rear corner of cab.	65.00	30 lbs.	10 lbs.
Fiber Glass Hood & Fenders in place of Steel	<u>Credit.</u>	261.00	-383 lbs.	-40 lbs.
<u>Rims.</u>				
	Spare Rim 7.5 x 20	25.00		69 lbs.
	Spare Rim 8.0 x 20	25.00		79 lbs.
	8.0 x 20 Rims (6 only in place of 7.5 x 20)	12.00	20 lbs.	40 lbs.
<u>Miscellaneous.</u>				
	Hand Control Valve	59.00		
	Breakaway Safety Valve	38.00		
	Separate Air Brake Reservoir	59.00		